


- The ball screws are preload and directly driven with servo motors to absolutely eliminate backlash between bearings and ball screws exhibiting excellent feeding accuracy.
- All axes are with high precision C3 grade ball screws.
- Ball screws diameter X: 40 mm Y, Z : 45 mm.



3-AXIS
BALL
SCREWS
PRELOAD

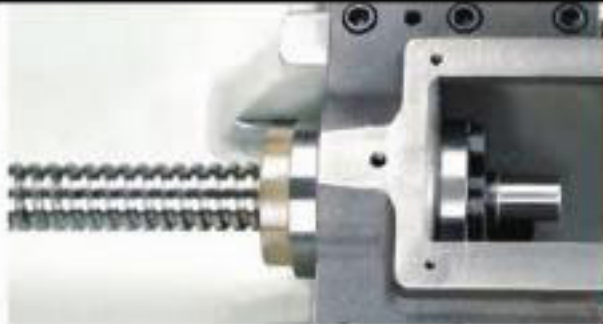