

SPECIFICATIONS OF POWER SUPPLY UNIT 電器規格


規格ITEM	機種MODEL	CR-2		CR-3/CR-5					CR-5C/CR-6C					
		30A	50A	30A	50A	75A	100A	150A※	200A※	50A	75A	100A	150A※	200A※
電器規格 Specification														
輸入電壓 Input voltage	3∅ V	220.346 380.440	220.346 380.440	220.346 380.440	220.346 380.440	220.346 380.440	220.346 380.440	220.346 380.440	220.346 380.440	220.346 380.440	220.346 380.440	220.346 380.440	220.346 380.440	220.346 380.440
電源容量 Input power	KVA	3	5	3	5	8	10	15	20	5	8	10	15	20
加工電壓 Working voltage (No load)	V	100	100	100	100	100	100	100	100	100	100	100	100	100
高壓選擇 High voltage	V	210	210	150 or 270	150 or 270	150 or 270	150 or 270	150 or 270	150 or 270	150 or 270	150 or 270	150 or 270	150 or 270	150 or 270
最小放電時間 Min.ON TIME	μ	2	2	1	1	1	1	1	1	1	1	1	1	1
最小休止時間 Min.OFF TIME	μ	2	2	1	1	1	1	1	1	1	1	1	1	1
最大加工速度 Max. cutting speed	mm ³ /min	220	480	230	480	720	1050	1450	1850	480	720	1050	1550	2000
最細表面光潔度 Best surface finish	μmRa.	0.5	0.5	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
最小電極消耗比 Min. electrode wear rate	%	0.5	0.5	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3
重量 Weight	kg/lbs	150/330	155/341	150/330	155/341	170/375	190/419	250/550	320/705	165/363	180/396	205/452	205/452	205/452

CR2/3 : Conventional type CR5/5C : ZNC CR6 : CNC ※Two Boxes

SPECIFICATIONS OF MACHINE UNIT 機械規格

規格 ITEM	機種 MODEL	CJ-230	CJ-340	CJ-341	CJ-345	CJ-450	CNC-430	CNC-640	CNC-850	CNC-1270
X軸行程 Table travel (X axis)	mm/inch	300 / 11.8	400 / 15.8	400 / 15.8	450 / 17.7	500 / 19.7	400 / 15.8	600 / 23.6	800 / 31.6	1200 / 47.2
Y軸行程 Table travel (Y axis)	mm/inch	200 / 7.9	300 / 11.8	300 / 11.8	350 / 13.8	400 / 15.8	300 / 11.8	400 / 15.7	500 / 19.7	700 / 27.6
Z軸行程(伺服軸) Quill travel (Z1 axis)	mm/inch	180 / 7.1	220 / 8.7	220 / 8.7	220 / 8.7	220 / 8.7	320 / 12.6	350 / 13.7	400 / 15.7	450 / 17.7
機頭行程 Work head travel (Z2 axis)	mm/inch	190 / 1.5	220 / 8.7	220 / 8.7	220 / 8.7	220 / 8.7	—	—	—	—
工作台尺寸(長X寬) Work table dimensions (LxW)	mm/inch	600 x 300 23.6 x 11.8	650 x 320 25.5 x 12.6	650 x 320 25.5 x 12.6	700 x 400 27.6 x 15.8	800 x 450 31.5 x 17.7	650 x 320 25.6 x 12.6	900 x 500 31.4 x 17.7	1000 x 600 39.4 x 23.6	1400 x 900 55.1 x 35.4
油槽內徑尺寸(寬X深X高) Work tank inner dimensions (WxDxH)	mm/inch	800 x 520 x 325 31.5 x 20.5 x 12.8	920 x 570 x 355 36.2 x 22.4 x 14	920 x 570 x 355 36.2 x 22.4 x 14	1060 x 680 x 455 41.7 x 26.7 x 17.9	1300 x 720 x 475 51.2 x 28.3 x 18.7	935 x 556 x 352 36.8 x 21.9 x 13.9	1200 x 785 x 492 47.2 x 30.9 x 19.4	1600 x 1000 x 592 63 x 39.4 x 23.3	2150 x 1150 x 700 84.5 x 45.3 x 27.6
最大油箱容量 Max. Capacity of dielectric fluid	Litre/Gallon	440 / 100	310 / 78	450 / 113	310 / 78	500 / 125	450 / 113	850 / 212	1150 / 900	3000 / 750
最大電極重量 Max. electrode weight	kg/lbs	40 / 88	75 / 165	75 / 165	75 / 165	150 / 330	75 / 165	100 / 220	120 / 264	400 / 880
最大工件重量 Max. workpiece weight	kg/lbs	500 / 1100	900 / 1980	1000 / 2200	1000 / 2200	1350 / 2970	1000 / 2200	1500 / 3300	2000 / 4400	5000 / 11000
機器尺寸(寬X深X高) Machine unit dimensions (WxDxH)	mm/inch	1175 x 1370 x 2100 46.3 x 53.9 x 82.7	1200 x 1300 x 2150 47.2 x 51.2 x 84.7	1200 x 1300 x 2150 47.2 x 51.2 x 84.7	1300 x 1350 x 2160 51.2 x 53.2 x 85.0	1600 x 1400 x 2200 63.0 x 55.1 x 86.6	1150 x 1700 x 2280 45.3 x 66.9 x 89.7	1520 x 2325 x 2465 59.8 x 39.1 x 97.0	1850 x 2800 x 2750 72.8 x 110.2 x 108.3	2500 x 2500 x 2940 98.4 x 98.4 x 115.7
機器總重 Machine unit weight	kg/lbs	870 / 1914	1500 / 3300	1850 / 4070	1550 / 3410	2050 / 4510	2300 / 5066	4150 / 9140	5400 / 11894	6000 / 13215

CJ series : C type machine CNC : RAM type machine
本公司保有變更設計之權利，以上規格如有更改恕不另行通知。
Continuing improvement will allow the maker to modify the design or specification without notice.

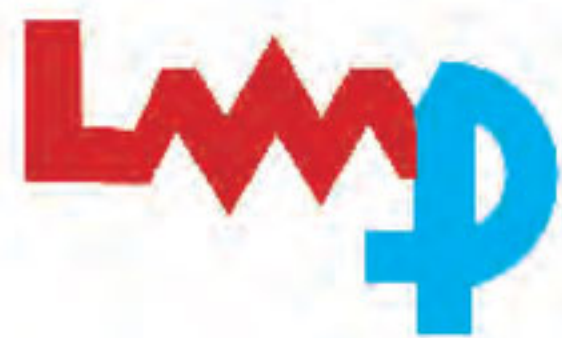

林寶機械貿易私人有限公司

LIM POH MACHINERY TRADING PTE LTD

NO. 111, UBI AVE 4, CIVIC TERRACE WAREHOUSE SINGAPORE 408761.

E-mail: enquiry@limpoh.com Website: http://www.limpoh.com

TEL: 6846 1138 FAX: 6846 2832 H/P: 9788 0138