


H igh Speed Precision Lathe

Characteristics

1. Selective bed width:
S series: 300mm.
M series: 350mm.
L series: 400mm.
2. Varied spindle bore diameters:
S series: $\text{Ø}58\text{mm}$ / $\text{Ø}78\text{mm}$ (Option).
M series: $\text{Ø}85\text{mm}$.
L series: $\text{Ø}85\text{mm}$ / $\text{Ø}115\text{mm}$ (Option).
3. With imported bearings installed on spindle, maximum cutting depth can be 8mm and roundness reaching 0.003mm(200mm long).
4. Equipped with plastic rear gears, shafts and gears inside headstock are well protected if crash should occur(S series).
5. Thermal treated and precision ground alloy gears.
6. Universal gearbox for both imperial and metric threading - conversion table also attached.
7. Tracks of cross slide and bed are well lubricated with lubrication pump(manual).
8. Overload device to ensure safety when operating.
9. Wear-resistant phosphor bronze lead screw nuts.
10. Durable reservoir oil bath type cross slide (for S series).
11. Thermal treated Meehanite cast bed.
12. One-piece base with high rigidity and low vibration.
13. High-capacity coolant tank offers sufficient coolant output.

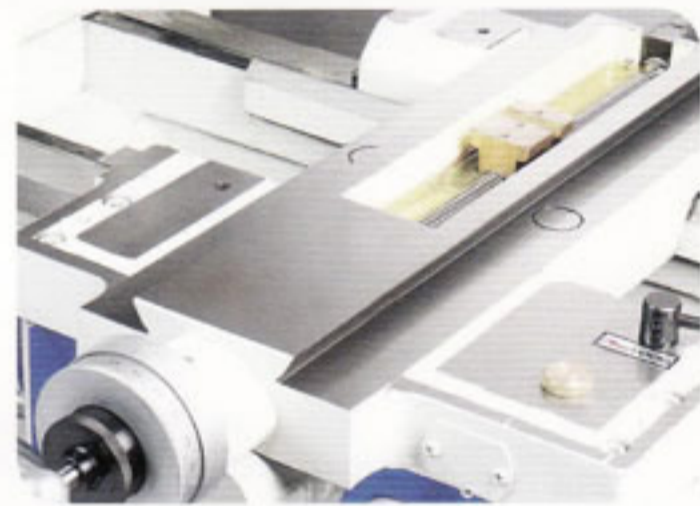

Reservoir Oil Bath Type Cross Slide
(S series)



林寶機械貿易私人有限公司

LIM POH MACHINERY TRADING PTE LTD

NO. 111, UBI AVE 4, CIVIC TERRACE WAREHOUSE SINGAPORE 408761.

Email: enquiry@limpoh.com Website: <http://www.limpoh.com>

TEL: 6946 1138 FAX: 6841 2832 H/P: 9788 0138