

# 2500 SERIES

## FEATURES & ACCESSORIES:



- ◆ Hand lubrication pump (auto lub pump on request).
- ◆ Long horizontal milling arbor applicable for helical cuttings.
- ◆ All "X", "Y" & "Z" axis wider square ways are hardened & ground.
- ◆ Backlash elimination is adjustable.




- ◆ Automatic stoppers on "X", "Y" & "Z" axis.
- ◆ Variable feeds on "X", "Y" & "Z" axis.
- ◆ Rapid traverse on "X", "Y" & "Z" axis.
- ◆ "Y" axis is coated turcite for wear resistance.
- ◆ Hardend lead-screws on "X", "Y" & "Z" axis.
- ◆ Inverter and 2.5HP elec. Motor fitted with cooling fan.



- ◆ Standard ISO#40 spindle optional ISO #50 spindle optional 10HP (7.5KW).
- ◆ Hardened lead-screws on "X", "Y" & "Z" axis.
- ◆  $\pm 45^\circ$  degrees L+R swivel table.
- ◆ Double clamps on all wider square slide ways.
- ◆ 2-Axis simultaneous movement.
- ◆ Automatic stoppers on "X", "Y" & "Z" axis.
- ◆ Oil lubrication splash bath system.



- ◆ Voltages are available 220V/380V/208V/415V/230V/460V/575V
- ◆ All CE mark elec. Components, are available 3 phase elec. overload safety device.
- ◆ Our equipment is made of high quality components which are available for immediate support and service
- ◆ Total sealed cabinet.

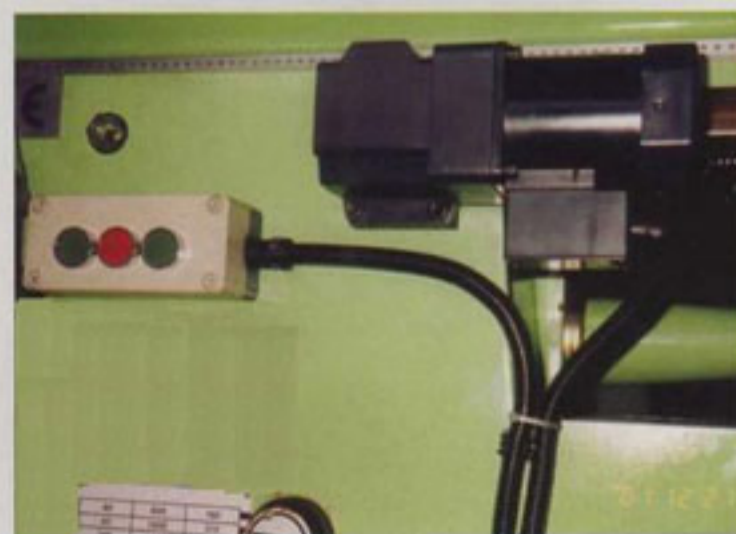

- ◆ AC auto for over-ARM moving device is available.
- ◆ Overarm Nos. of speed range:12
- ◆ Motorised overarm speed:35-1,600 R.P.M. (50HZ)